




MODEL SHOWN: OMNI MKII SIZE 5

OMNI MKII

BURGLARY & FIRE-RESISTANT SAFE

KEY FEATURES




- \$25,000 Cash Rating
- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubb safes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed “anti-heeling” bolts on both front and rear edges protect the door from prying attack.
- Glass relocker to ensure bolts to remain firmly in place should an attack on the lock occur (featured on model 30 and above).
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable.
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- Omni has been tested in accordance with EN 15659 LFS, and is certified to level 60P by ECB•S giving 1 hour fire protection.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Standard Internal Fittings
M-15	410	360	360	278	230	230	13	104	1 Shelf
M-30	488	435	435	356	280	240	31	157	1 Shelf, 1 Drawer
M-40	590	435	445	458	305	305	39	180	1 Shelf, 1 Drawer
M-75	590	550	550	458	420	420	76	257	1 Shelf, 1 Drawer
M-95	717	550	550	585	420	420	97	293	1 Shelf, 1 Drawer
M-125	894	550	550	762	420	420	127	347	1 Shelf, 1 Drawer
M-225	1047	640	640	915	510	510	227	481	1 Shelf, 1 Drawer

*Handle projection is 56mm.

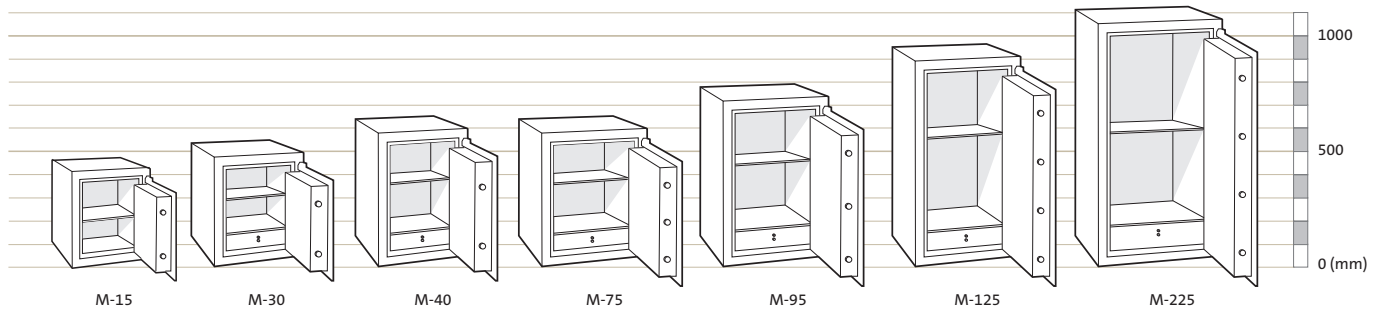

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight** (kg)	No. of Shelves	No. of Drawers
M-15	410	360	386	280	230	205	13	104	1	0
M-30	488	435	461	358	305	280	31	157	1	1
M-40	590	435	461	460	305	280	39	180	1	1
M-75	590	550	576	460	420	395	76	257	1	1
M-95	717	550	576	587	420	395	97	293	1	1
M-125	894	550	576	764	420	395	127	347	1	1
M-225	1047	640	666	917	510	485	227	481	1	1

* Handle projection is 56mm. ** In line with certification, weights can vary by +/- 5%

LOCK OPTIONS

As the standard locking option, all models of Omni Mk II are fitted with a key lock and a combination lock.

KEY LOCK

Secured by eight-lever double-bitted, non-key retaining key lock.

COMBINATION LOCK

Listed under UL Group 2, VdS class 2, CEN B, A2P B. Gain enhanced control via the Sargent & Greenleaf certified three-wheel combination lock.


ELECTRONIC LOCK



The high-security electronic lock includes the following features, easily programmed by the owner:

- 1 master code and 1 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.

TESTING



BURGLARY

Certified by ECB-S in accordance with the European standard, EN 14450, for burglary protection in S2.



FIRE

Independently tested and certified by ECB-S according to European Standard EN 15659 LFS as providing document fire resistance for up to 60 minutes.